

Electromagnetic lock


- integrated lock in the door frame
- plate integrated in the door leaf for metallic double flush doors
- surface-mounted plate for metallic single flush doors, HPL doors or fire resistant door (DAGfeu)
- Power voltage 12 or 24 V DC.
- Inductive locking contact



lock and plate

Contact switch

To collect independent information about the status of door (open or closed) on one leaf or on the 2 leaves.

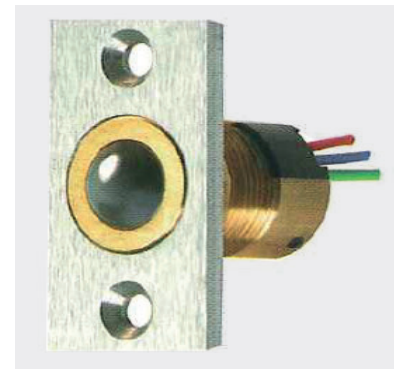

Specific solution : Electric lock

Electric lock on specific request
type ASSA ABLOY with integrated contact

