




The lacquered stainless sheet is composed of a stainless steel sheet 304 on which is bonded a PVC + PET film.

Heavy-duty in aggressive environment, this facing allows a high pressure cleaning and the use of detergent products (basic acids, pH 4 à 9).

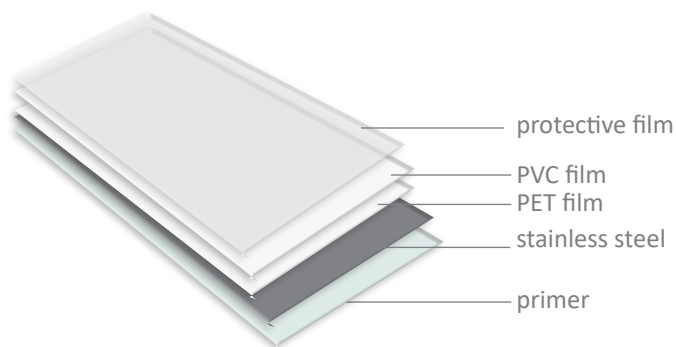

Characteristics

The stainless steel sheet EN 1.4301 (AISI 304) is coated :

On the external face

- PVC + PET film of thickness 130 μ (5.1 mil)
- protective film to remove after installation.

On the internal face (insulating side), it is coated with a fixing primer from 5 to 7 microns (0.2 to 0.3 mil).

Thickness : 0,60 mm 0.02"

Finishing : smooth

Colour : iceberg white (close to RAL 9010)

Recommendation

Inside

This sheet, rating Vc or C (according to the XP P 34-301 standard) , is recommended for inside environment until Ai6, (very aggressive environment, with intensive cleaning, high humidity). (according to NFP 75-401 standard and to the DTU 45.1).

Outside

The stainless steel sheet is not recommended for outside use.